


## Specifications

- **Open-loop stroke: 130  $\mu\text{m}$  @ 150V (fixed-free)**  
\*Tolerance value: 104~156  $\mu\text{m}$
  - **Operating voltage: -20 V ~ +150 V**
  - **Stiffness in motion direction: 0.10 N/ $\mu\text{m}$**
  - **Resonance frequency(fixed-free): 1750 Hz**  
\*Tolerance value: 1400~2100 Hz
  - **Blocked force: 13 N** (\*Tolerance value: 10.4~15.6N)
  - **Capacitance: 0.73  $\mu\text{F}$**
  - **Dimension: 28x8x8 mm**
  - **Mechanical interface: 2-M2.0 Tapped hole and 4-M2.0 Tapped hole**
  - **Environment: 0 to 85°C with humidity less than 40%**
  - **Mass: 8.2 g**
- \*All dimensions and specifications stated are nominal.

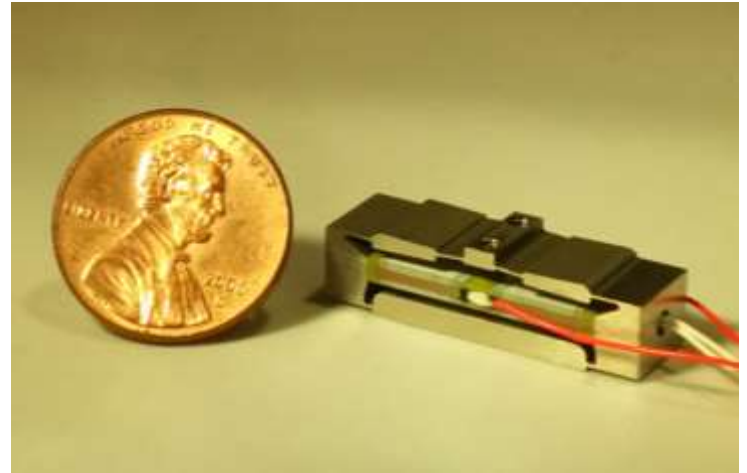

### Option:

- Mechanical interface can be tailor with an addition option fees.

### Geometry

